

LTCP

LED handlamps for zone 1 & 21



Explosion protection: II2G Ex e mb IIC T5 Gb
II2D Ex mb IIIC T95°C IP66 Db

Type certificate: CEC 13 ATEX 042

Ambient temp.: -20°C ÷ +40°C

End caps: Polyamide


Diffuser: UV resistant polycarbonate

Light source: LED, 80lm/W, 4000K, 120° Angle

Power supply: 230Vac , 50/60Hz ±10% [230AC]
24Vdc ±10% [24DC]

Cable: Standard 10m prewired cable:
- Neoprene H07RN-F 1.5mm²
- Polyurethane H07BQ-F 1.5mm²
[Other lengths on request]

DRAWING & DIMENSIONS

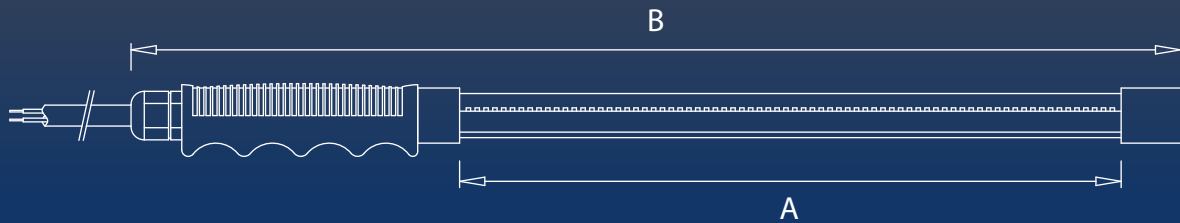

SELECTION CHART & DIMENSIONS

Product Code	Power Rating	Luminous Flux	Length A	Length B
LTCP..10..	9W	800lm	300mm	475mm
LTCP..20..	18W	1600lm	600mm	775mm